


PadPlus

IGM Series



PadPlus

IGM Series

49"/ 55"/ 65"/ 70"/ 84"/98"



> Product Features



Pre multiple input ports for different application



Support synchronous interaction with smart phone, tablet PC and computer (optional)



IR 6 points touch and writing



One button power On / Off



One button energy saving



Pre built in HD camera



Pre built in sound pick-up



Pre OSD menu buttons



One-time molding processing for front cover



Full metal baking varnish material

Applications



Floor Standing Type *Optional accessory



Used in Office Building



Wall Mounting Type *Optional accessory




Used in Education



Used in Hospital



Floor Standing Type Used in Office Meeting Room



Specification

Model	49 inch	55 inch	65 inch	70 inch
Screen Size	49"	55"	65"	70"
Display Size (mm)	1075.8(H)×606(V)	1209.6(H)×680.4(V)	1431(H)×807(V)	1555(H)×875(V)
Aspect Ratio	16:9	16:9	16:9	16:9
Resolution	1920×1080	1920×1080	1920×1080	1920×1080
Brightness	450 cd/m2	450 cd/m2	450 cd/m2	450 cd/m2
Contrast Ratio	5000:1	5000:1	5000:1	5000:1
View Angle	178°	178°	178°	178°
Colors	16.7M	16.7M	16.7M	16.7M
Life Time	60000 hours	60000 hours	60000 hours	60000 hours
Product Size (mm)	1180.5(H)×717(V)×95.5(D)	1274.4(H)×765.3(V)×85.7(D)	1503.6(H)×901.58(V)×84.88(D)	1617.8(H)×961.9(V)×88.5(D)
Packing Size (mm)	1344(H)×882(V)×256(D)	1440(H)×941(V)×246(D)	1730(H)×1175(V)×310(D)	1819(H)×1220(V)×300(D)
VESA(mm)	400×300mm	400×400mm	400×600mm	400×500mm
Weight	Net Weight: 25KG Gross Weight: 28KG	Net Weight: 47.6KG Gross Weight: 55KG	Net Weight: 68.8KG Gross Weight: 78.8KG	Net Weight: 66.6KG Gross Weight: 78KG
Power	105W	120W	180W	220W
Speaker	2*15W	2*15W	2*15W	2*15W
Operation System	Windows 8.1&Android			
Touch Points	6 Points			
Touch Screen Type	IR Touch			
Front Port	HDMI*1, TOUCH*1, USB*3			
Side Port	AV IN*1, AV OUT*1, LR*1, YPBPR*1, RF*1, WIFI*3, LAN*1			
Underface Port Of Back Side	USB*1, RS232*1, TOUCH*1, HDMI*1, VGA OUT*1, VGA IN*1, Audio IN*1, Audio OUT*1			
Processor	Intel Baytrail-CR(Quad-core), Z3735G			
RAM	2G			
ROM	64G			
MicroSD Type	MicroSD(TF)			
GB	128G			
Input Voltage	AC100-240V(50/60HZ)			
Working Temperature	0~40°C			
Working Humidity	10% ~ 80%RH			
Accessory	Remote Control , Wireless photoelectric keyboard suit, plug, HDMI cable, USB extension cable, WIFI antenna, touch pen, magnetic pem, USB dongle, QSD, Cd-rom manual			

Applications



Floor Standing Type *Optional accessory



Used in Office Building



Wall Mounting Type *Optional accessory




Used in Education



Used in Hospital



Floor Standing Type Used in Office Meeting Room



Specification

Model	84 inch	98 inch
Screen Size	84"	98"
Display Size(mm)	1871.0(H)x1057.0 (V)	2163.9(H)x1219.5(V)
Aspect Ratio	16:9	16:9
Resolution	3840x2160	3840x2160
Brightness	350 cd/m2	500 cd/m2
Contrast Ratio	5000:1	5000:1
View Angle	178°	178°
Colors	16.7M	16.7M
Life Time	60000 hours	60000 hours
Product Size (mm)	1948.5 (H) x1162.5(V)x93(D)	2213 (H) x1295(V)x129(D)
Packing Size (mm)	2300 (H) x1570 (V) x505 (D)	2240 (H) x1690 (V) x530 (D)
VESA (mm)	600x800	800x800
Weight	Net Weight: 121KG Gross Weight: 316KG	Net Weight: 160Kg±1 Kg Gross Weight: 336Kg±2 Kg
Power	400W	600W
Speaker		2*15W
Operation System	Windows XP/Windows VISTA/Win7/Mac OSX Cross-platform from service	
Touch Points	6 Points	
Touch Screen Type	IR Touch	
Input Signal	HDMI/VGA/USB/RJ45 internet access	
Side Port	AV/Audio, RS232 Control port, VGA, YPbPr/Audio, AUDIO, HDMI(support 1080P/Built-in 1 road), Media USB, Touch Frame A-USB, HDMI(True 4K*2K)	
Front Port	Front Touch-USB, HDMI Port, Built-in PC-USB Port	
Output Port	AUDIO, AV/Audio, VGA	
Working Voltage	AC100-240V 50/60HZ	
Working Temperature	0-50°C	
Working Humidity	10%-85%RH	
Accessory	Remote Control , Wireless photoelectric keyboard suit, plug, HDMI cable, USB extension cable, WIFI antenna, touch pen, magnetic pem, USB dongle, QSD, Cd-rom manual	



Surveillance Display

CSDP Series

32"/ 43"/ 49"/ 55"



> Product Features



Smart color management



Smart signal backup



Smart Power Supply



System alarm function



Smart center control management



Built in tiling function



Smart color temperature management



Smart heat dissipation management



Smart ID assigning

Applications



< Fast food chain



Clothing Store >



< Store Building



Convenience Store >



< Subway PICS Display Applications




The Cinema Sales >



< Garment Industry



Office Building >



Specification

Model	M32SDP	M43SDP	M49SDP	M55SDP
Screen Size	32"	43"	49"	55"
Display Size	698.4 (H) ×392.9(V)	941.2 (H)×529.42(V)	1073.78 (H)×604(V)	1209.6 (H)×680.4(V)
Aspect Ratio	16:9	16:9	16:9	16:9
Resolution	1920×1080	1920×1080	1920×1080	1920×1080
Brightness	400 cd/m2	450 cd/m2	450 cd/m2	450 cd/m2
Contrast ratio	5000:1	5000:1	5000:1	5000:1
View Angle	178°	178°	178°	178°
Colors	16.7M	16.7M	16.7M	16.7M
Life Time	60000 hours	60000 hours	60000 hours	60000 hours
Product Size(mm)	723.4(H)×422.9(V)×56.8(D)	963.6(H)×557.92(V)×57.5(D)	1096.18(H)×632.5(V)×57.5(D)	1232(H)×708.9(V)×57.5(D)
Packing Size (mm)	863.8(H)×567.5(V)×226.8(D)	1103(H)×703.5(V)×227.5(D)	1236(H)×778.5(V)×227.5(D)	1371(H)×855(V)×227.5(D)
Frame(mm)	Three sides(Or so on):each10,Under:15	Three sides(Or so on):each8.9,Under:15	Three sides(Or so on):each8.9,Under:15	Three sides(Or so on):each8.9,Under:15
VESA(mm)	200×200mm	200×400mm	300×400mm	300×400mm
Weight	Suttle: 8KG Gross weight: 10KG	Suttle: 15KG Gross weight: 17.5KG	Suttle: 20KG Gross weight: 23KG	Suttle: 25KG Gross weight: 28KG
Power	38W	47W	55W	68W
Speaker	2*2W 4Ω	2*2W 4Ω	2*2W 4Ω	2*2W 4Ω
Input Port	RJ45*1, USB*2, HDMI*1, VGA*1, Audio*1, TF			
Input Voltage	AC100-240V(50/60HZ)			
Working Temperature	0--40°C			
Working Humidity	10% -- 80%RH			
Accessory	Ac Power Cord, WIFI Antenna, Remote Control, QSG, CD Specification, Product Certificate, Warranty Card			



Video Wall

VWPD Series



Video Wall

VWPD Series

49"/55"



> Product Features



Smart color management



Smart signal backup



Smart Power Supply



System alarm function



Smart center control management



Built in tiling function



Smart color temperature management



Smart heat dissipation management



Smart ID assigning

Applications



< Security Surveillance



> Public security bureau



< Dispatch Control



> Meeting Room



< Command Center




> Lily Flagship Store



< Display Wall



> Taian Information Technology

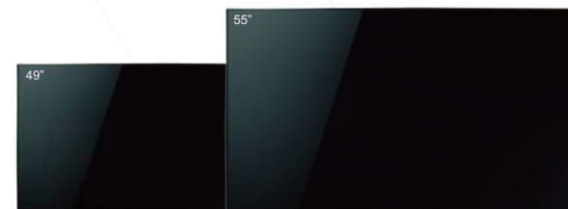

Specification

Model	49 inch	55 inch
Backlight	LED	LED
Bezel	3.5mm	3.5mm
Screen Size(mm)	49"	55"
Product Size(mm)	1077.5(H)x807.8(V)x113.8(D)	1213.4(H)x684.2(V)x117(D)
Display Size (mm)	1074(H)x604.3(V)	1209.6(H)x680.4(V)
Pixel Pitch	0.55926(H)x0.55926(V)	0.63(H)x0.63(V)
Resolution	1920x1080	1920x1080
Brightness	450cd/m ²	500cd/m ²
Contrast Ratio	1300:1	1400:1
Viewing Angle	178°	178°
Colors	16.7M	16.7M
Response Time	8ms	8ms
Color Temperature	10000K	10000K
Life Time	60000 hours	60000 hours
Power	160W	213W
VESA	300×600mm	300×600mm
Input Voltage	AC100-240V(50/60HZ)	
Working Temperature	0~50°C	
Working Humidity	10% ~ 80%RH	
Input Port	2*Video, VGA, DVI, RGB/HV, HDMI, YPbPr, Audio, (Display Port, SDI Optional)	
Output Port	Video, Audio, SDI (Optional)	
Control Port	RS232 IN DB9(female) RS232 OUT DB9(male)	



Digital Signage

SML Series
CMSAP Series
WMPF Series



Digital Signage

SML/ CMSAP/ WMPF Series

22"/ 32"/ 43"/ 49"/ 55"



SML Series



CMSAP Series



WMPF Series

>Product Features



Built in decoding media player



WIFI+LAN (3G Optional)



Smart timer on / off



Switch source channels by timer



Landscape and portrait (For MSA and PF series)



Android system



Maintenance door design makes maintenance service be easy



Encryption



All Upgraded

- ▲ LG Commercial Panel
- ▲ High illuminance 450 nits
- ▲ 24/7

LG Stock IPS Panel

High illuminance to 450 nits, twice the brightness of a television, a perfect choice for commercial use.

IPS simply provide you a clearer world



TV panel, a blur world



IPS Panel VS TV Panel

Brightness & Lifecycle




450cd/m²
Brightness

5000:1
Contrast

60000 hour
Backlit

7x24
hour

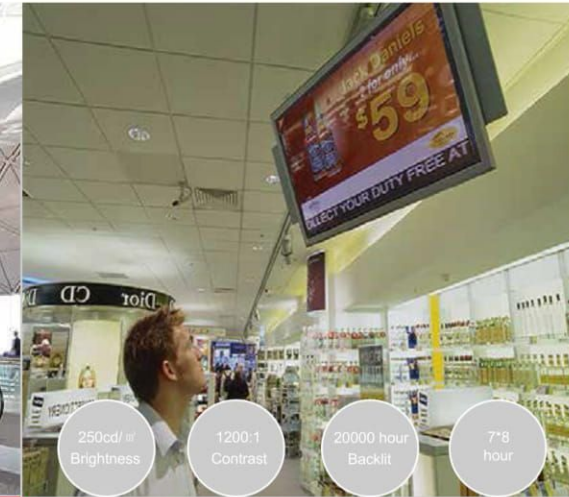

250cd/m²
Brightness

1200:1
Contrast

20000 hour
Backlit

7*8
hour

IPS Commercial Panel

Brightness

High illuminance, anti-reflection, high resolution, anti-glare, no distortion, best option for ad application.

Brightness

Industrial graded components to meet 7*24*365 heavy task load.

TV Panel

Brightness

Low illuminance, reflection & glare and distortion, not a good choice for advertisement application.

Brightness

Short working time like 6-8 hours per day is fine, but if 7*24, that's a total different story.



5 advantages of Commercial IPS Panel

Screen Blackspot

Commercial IPS PD Panel
choose IPS

Black spot pile up on a TV screen



IPS PD Panel
18hx7 days

TV Panel
8hx7 days

Darkening

Long hours exposure in sun light, Temp, raise to 110°C
LGD IPS PD Panel no darkening


LGD IPS PD Panel

Temp, raise to 110°C (23°F) no darken



Other Panel

Long term exposed in sun light, Temp.
75°C (167°F) Darkening appered



Back-flow of liquid crystal

Gravity drags down liquid crystal

LG PD Panel
No backflow



TV Panel


Liquid crystal drops, gather
downside and appear yellow



Energy- Saving

LG IPS Panel use Local Dimming technology to Increase
contrast and save energy


LED(Edge or Direct)backlit
control backlight individually

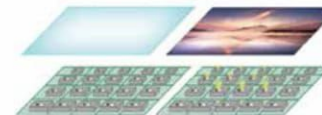

Backlit off
(Power 0%)

Partially switch off backlight
(Power 45%)

Lmap(CCFL or EEFL)backlit
Backlit could only be controed as a whole

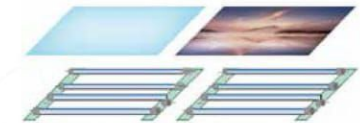


Backlit off
(Power 0%)

Partially switch off backlight
(Power 100%)

Anti-reflection


Mixed reflection light and screen light reduce
image quality, LGD adapt AR coatin

AR coating
on polarizer

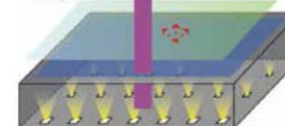

LGD shineout Panel

AR coating reduced the effect of reflection

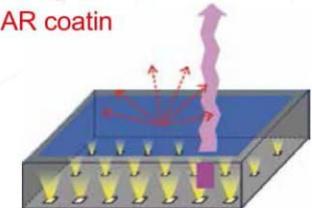

Other Panel

Reflection mix with backlight, case messy effect

Applications



< Fast Food Chain



The hotel >



< Mall Building



Fast Food Restaurant >



< O2O Industry




The Cinema >



< Apparel Industry



The tea restaurant >



CMSAP Series

Specification

Model	32 inch	43 inch	49 inch	55 inch
Screen Size	32"	43"	49"	55"
Display Size	698.4(H)x392.9(V)	941.2(H)x529.42(V)	1073.78(H)x604(V)	1209.6(H)x680.4(V)
Aspect Ratio	16:9	16:9	16:9	16:9
Resolution	1920x1080	1920x1080	1920x1080	1920x1080
Brightness	400cd/m ²	450cd/m ²	450cd/m ²	450cd/m ²
Contrast ratio	5000:1	5000:1	5000:1	5000:1
View Angle	178°	178°	178°	178°
Colors	16.7M	16.7M	16.7M	16.7M
Life Time	60000hours	60000hours	60000hours	60000hours
Product Size	723.4(H)x422.9(V)x56.8(D)	963.6(H)x557.92(V)x57.5(D)	1096.18(H)x632.5(V)x57.5(D)	1232(H)x708.9(V)x57.5(D)
Frame	723.4(H)x422.9(V)x56.8(D)	963.6(H)x557.92(V)x57.5(D)	1096.18(H)x632.5(V)x57.5(D)	1232(H)x708.9(V)x57.5(D)
Packing Size	863.8(H)x567.5(V)x226.8(D)	1103(H)x703.5(V)x227.5(D)	1236(H)x778.5(V)x227.5(D)	1371(H)x855(V)x227.5(D)
VESA	200x200mm	200x400mm	300x400mm	300x400mm
Weight	Net weight:8KG Gross weight:10KG	Net weight:15KG Gross weight:17.5KG	Net weight:20KG Gross weight:23KG	Net weight:25KG Gross weight:28KG
Power	40W	47W	55W	68W
Speaker	2*2W 4Q	2*2W 4Q	2*2W 4Q	2*2W 4Q
Operation System	Android			
Input Port	RJ45*1, USB*2, HDMI*1, VGA*1, Audio*1, TF, SIM			
Play mode	Horizontal Vertical Full screen Split screen play			
Play Time Setting	Support			
Playlist Transmission Mode	USB, Local Area Network, Internet			
Watchdog Reset Function	Support			
Timing	More time time switch machine, automatic switch port timing			
Power Supply	AC100-240V 50/60HZ			
Working Temperature	0~40 C			
Working Humidity	10%~80%RH			
Accessory	CD Specification, Warranty Card, Remote Control, Certificate Of Quality, QSG, Power Cord			

Applications



< Shopping Malls >



The hotel lobby >



< The Bank >



Office Building >



< Home Shopping Mall >




Movie Theatre >



< Stomatological Hospital >



University Library >



SML Series

Specification

Model	43 inch	49 inch	55 inch
Screen Size	43"	49"	55"
Display Size	529.42(H)x941.2(V)	604(H)x1073.78(V)	680.4(H)x1209.6(V)
Aspect Ratio	9:16	9:16	9:16
Resolution	1920x1080	1920x1080	1920x1080
Brightness	450cd/m ²	450cd/m ²	450cd/m ²
Contrast ratio	5000:1	5000:1	5000:1
View Angle	178°	178°	178°
Colors	16.7M	16.7M	16.7M
Life Time	60000hours	60000hours	60000hours
Product Size	657(H)x1787(V)x100(D)	734(H)x1837(V)x100(D)	807(H)x1947(V)x100(D)
Packing Size	796(H)x1970(V)x667(D)	914(H)x2005(V)x576.5(D)	985(H)x2115(V)x575(D)
Weight	Net weight:71KG Gross weight:76KG	Net weight:74KG Gross weight:78KG	Net weight:86KG Gross weight:91KG
Power	50W	60W	75W
Speaker		8Ω6W	
Operation System		Android	
Input Port		RJ45*1, USB*2, HDMI*1, VGA*1, Audio*1, TF, SIM	
Play mode		Horizontal Vertical Full screen Split screen play	
Play Time Setting		Support	
Playlist Transmission Mode		USB, Local Area Network, Internet	
Watchdog Reset Function		Support	
Timing		More time time switch machine, automatic switch port timing	
Power Supply		AC100-240V 50/60HZ	
Working Temperature		0-40 C	
Working Humidity		10%-80%RH	


Accessory CD Specification, Warranty Card, Remote Control, Certificate Of Quality, QSG, Power Cord, Wifi Antenna, Key



PF Series

Specification

Model	22 inch	32 inch	43 inch	49 inch	55 inch
Screen Size	22"	32"	43"	49"	55"
Display Size	476.046(H)×267.786(V)	698.4(H)×392.9(V)	941.2(H)×529.416(V)	1073.78(H)×604(V)	1209.6(H)×680.4(V)
Aspect Ratio	16:9	16:9	16:9	16:9	16:9
Resolution	1920×1080	1920×1080	1920×1080	1920×1080	1920×1080
Brightness	250 cd/m2	400 cd/m2	450 cd/m2	450 cd/m2	450 cd/m2
Contrast ratio	1000:1	5000:1	5000:1	5000:1	5000:1
View Angle	178°	178°	178°	178°	178°
Colors	16.7M	16.7M	16.7M	16.7M	16.7M
Life Time	60000 hours	60000 hours	60000 hours	60000 hours	60000 hours
Product Size	548(H)×340(V)×44.1(D)	786(H)×480.5(V)×61.3(D)	1034.5(H)×622.5(V)×62(D)	1168(H)×698(V)×62.5(D)	1303(H)×744(V)×62.5(D)
Packing Size	634(H)×424.5(V)×126(D)	908(H)×646(V)×183(D)	1156.5(H)×788(V)×183.6(D)	1290(H)×843.5(V)×184.5(D)	1425(H)×939.5(V)×184.5(D)
VESA(mm)	100×100	200×200	200×400	300×400	300×400
Weight	Net weight: 6.4KG Gross weight: 8KG	Net weight: 16KG Gross weight: 18KG	Net weight: 21KG Gross weight: 24KG	Net weight: 28KG Gross weight: 33KG	Net weight: 35KG Gross weight: 40KG
Power	17W	40W	47W	55W	68W
Speaker	2*2W 4Ω	2*2W 4Ω	2*2W 4Ω	2*2W 4Ω	2*2W 4Ω
Operation System	Android				
Input Port	RJ45*1 · USB*2 · HDMI*1 · VGA*1 · Audio*1 · TF · SIM				
Play mode	Horizontal Vertical Full screen Split screen play				
Play Time Setting	Support				
Playlist Transmission Mode	USB · Local Area Network · Internet				
Watchdog Reset Function	Support				
Timing	More time time switch machine, automatic switch port timing				
Power Supply	AC100-240V 50/60HZ				
Working Temperature	0-40 °C				
Working Humidity	10%-80%RH				
Accessory	CD Specification, Warranty Card, Remote Control, Certificate Of Quality, QSG, Power Cord				



Media Player

Android system with high reliability, support to display 1080P HD media files, landscape and portrait display are available.

Support EzPoster and CDMS software with network (Intranet and Internet) control function.

Be accessible to network easily by WIFI.



Android Digital Signage Player Specification

Hardware	
Product Size	155mm L x 104mm W x 33mm H
CPU	Quad Core Cortex-A9 @1.6GHz
GPU	Mali-400 MP4 @600MHz
RAM	DDR3 1G
ROM	8GB NAND
USB	USB2.0 HOST x2
Memory Slot	TF/MicroSD x1
Video Output	HDMI x1,VGA x1
Audio Output	Stereo Line out x1(3.5mm Earphone Jack)
LAN	10/100M Ethernet
WIFI	802.11b/g/n
DC Input	5V/2A, 4.2mm DC Jack
System	
OS	Android 4.2.2
Graphic Engine	OpenGL ES 1.1/2.0,OpenVG 1.1
Video Decode	*MPEG1/2/4,Real,WMV,H.264,VP8, Resolution:1920x1080*
Image Decode	JPEG,BMP,PNG,GIF
Supported Software	
EzPoster	Standalone and Intranet function
CDMS	Internet function
Working Environment	
Working Temperature	0 °C - 40°C
Working Humidity	10% - 90%
Storage Temperature	-40°C - 70°C, Recommended 5°C - 35°C
Others	
Timer On/Off	Support
System Upgrade	Support USB and internet upgrade
Power Supply	+5V
Power Consumption	≤5W



Standalone & LAN intranet solution: EzPoster




EzPoster is an innovation in digital signage that can maximize the impact of your message. Create your own signage content by using your PC and the free EzPoster software. Transfer that content by using a USB flash drive or intranet, and plug it into the digital signage display to run the content, no additional hardware is needed.

Cost Effective
No need to buy a media player.

Customized to your needs
Signage content can be customized for your business, EzPoster allows you to create your own signage content and make revisions on the fly.


Fast and easy
Edit content quickly and easily, select one of the pre-made templates, add your images, videos and text to it. It's that simple.

Create your content by just 4 steps

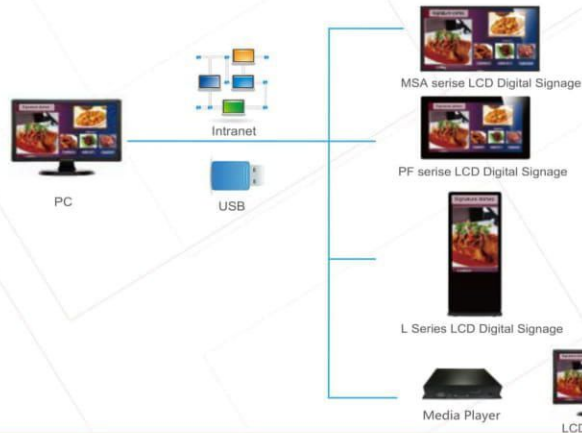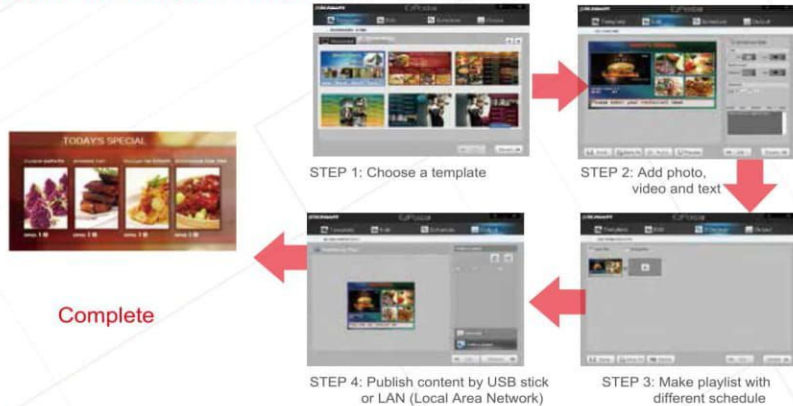

Internet Solution: CDMS

CDMS (Content Distribution Management System) is a B/S digital signage software that can help you create, schedule and deliver multimedia content to any of your digital sign in anywhere at anytime through internet, it's the perfect solution to manage your digital signage network.

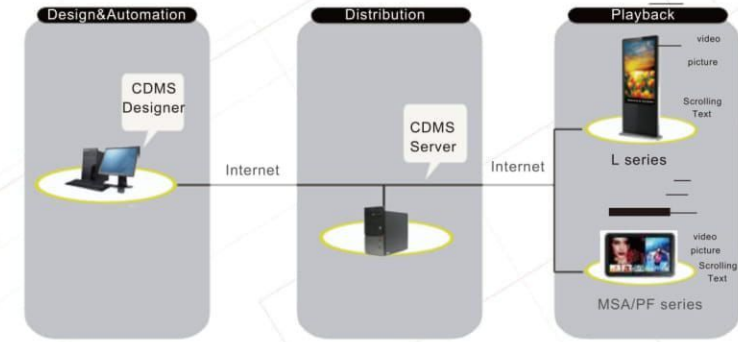

- Media management to manage all your media files efficiently by thumbnail and online quick view.
- The Screen layout can be customized as you like to make all different kind of template.
- The easy to use interface and what you see is what you get operation allow you to create program just as you like.
- You can easily make playlist by CDMS and sync with all CDMS player through internet to play the specified program at specified time just as you like.
- The real time player management put you in fully control of your CDMS player network through internet wherever they located.
- System logs record and report the detailed operation of the users of CDMS and CDMS players in the network.



STEP1 Upload media file to server




STEP2 Choose or Create a template



STEP3 Create a playlist



STEP4 Assign playlist to LCD display

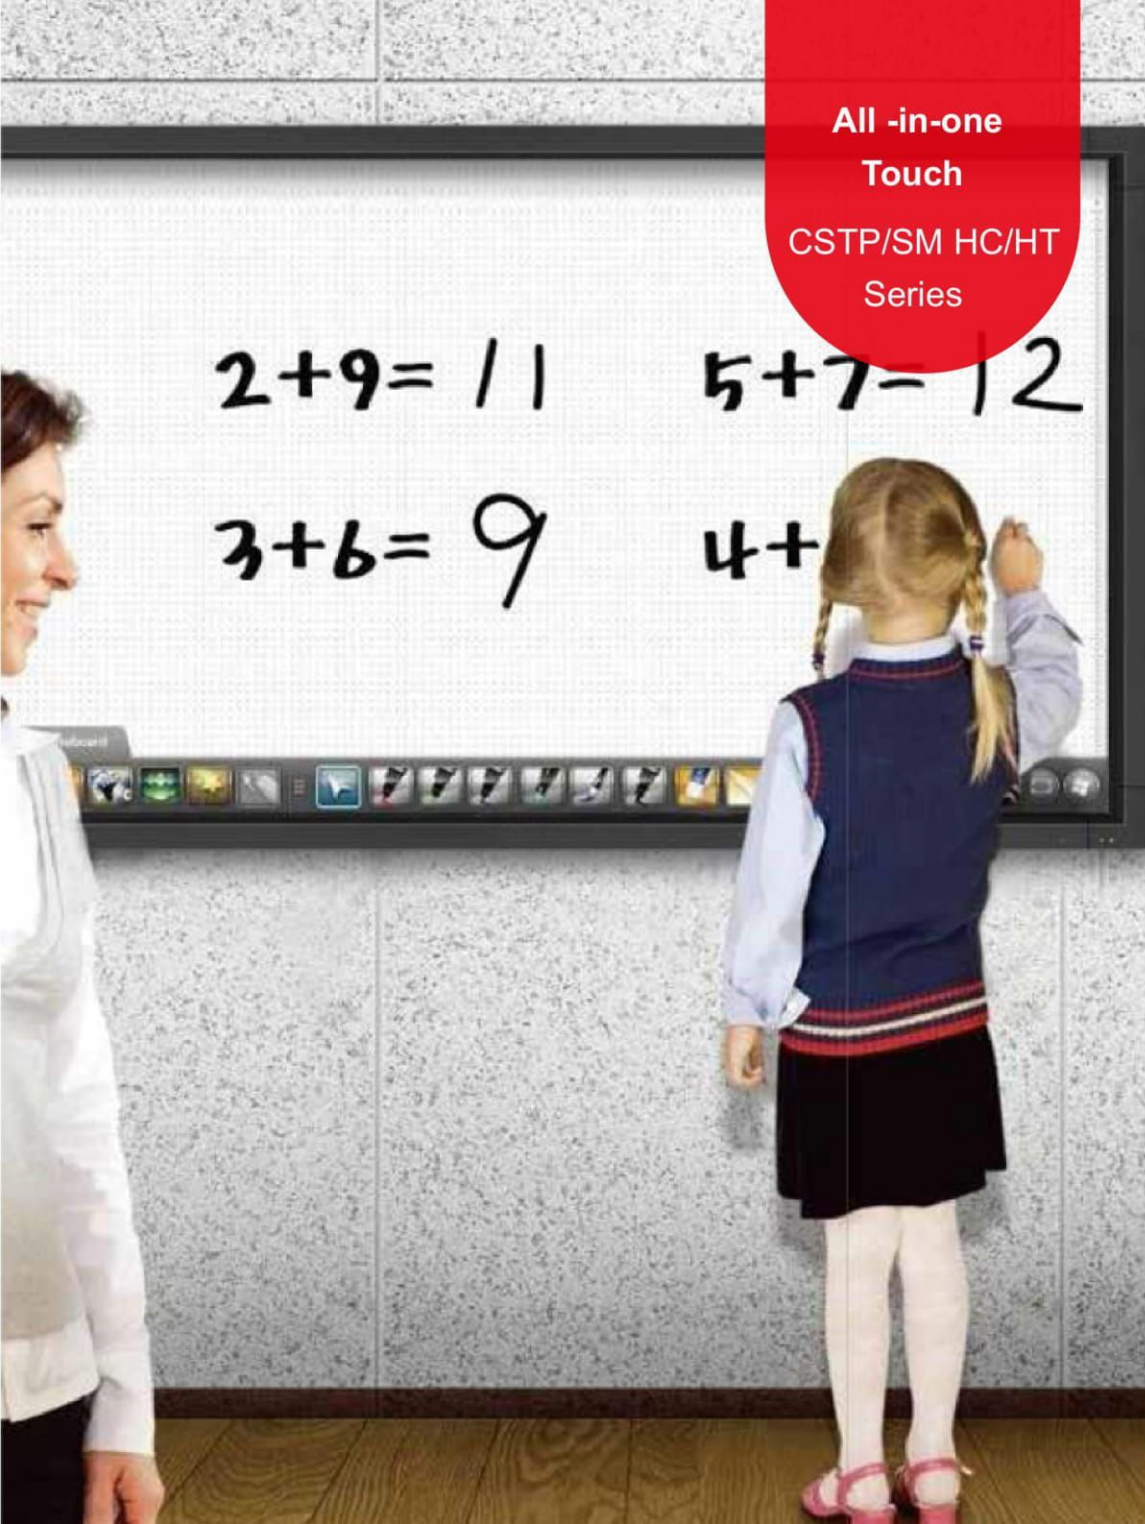

**All -in-one
Touch
CSTP/SM HC/HT
Series**



All-in-one Touch

CSTP/SM HC/HT Series

22"/ 32"/ 43"/ 49"/55"



CSTP Series



SM HT/HC Series

> Product Features



IR multiple 6 points touch



Driver free, plug and play



100% strong light anti-interference



Super sensitive response speed



High speed touch performance



180° wide view angle



Android system with EzTouch software (optional)

Applications



< Cinema



Clothing Store >



< Exhibition



The Club >



< Government & Enterprise




The Office >



< Retail Promotion



Pharmacy >





Specification

Model	32 inch	43 inch	49 inch	55 inch
Screen Size	32"	43"	49"	55"
Display Size	707.8 (H) ×400.8(V)	949 (H)×537.6(V)	1080.2 (H)×610.8(V)	1218 (H)×687.2 (V)
Aspect Ratio	16:9	16:9	16:9	16:9
Resolution	1920×1080	1920×1080	1920×1080	1920×1080
Brightness	400 cd/m2	450 cd/m2	450 cd/m2	450 cd/m2
Contrast ratio	5000:1	5000:1	5000:1	5000:1
View Angle	178°	178°	178°	178°
Colors	16.7M	16.7M	16.7M	16.7M
Life Time	60000 hours	60000 hours	60000 hours	60000 hours
Product Size(mm)	779.1(H)×473.7(V)×72.4(D)	1025.2(H)×614.2(V)×72.1(D)	1158.2(H)×689.2(V)×72.1(D)	1292(H)×762.6(V)×73.5(D)
Packing Size (mm)	919.1(H)×618.5(V)×212.4(D)	1065(H)×761.5(V)×212(D)	1298(H)×833.5(V)×212(D)	1432(H)×907.5(V)×213.5(D)
Frame(mm)	Around: 35.65, Up&Down: 36.45	Around: 38.1, Up&Down: 38.3	Around: 39, Up&Down: 39.2	Around: 37, Up&Down: 37.7
VESA(mm)	200×200mm	200×400mm	300×400mm	300×400mm
Weight	Suttle: 13KG Gross weight: 16.5KG	Suttle: 23.5KG Gross weight: 27KG	Suttle: 30.7KG Gross weight: 35KG	Suttle: 36KG Gross weight: 41KG
Power	51W	60W	69W	81W
Speaker	2*2W 4Ω	2*2W 4Ω	2*2W 4Ω	2*2W 4Ω
Operation System	Windows 8.1&Android			
Touch Points	6 Points			
Touch Screen Type	Infrared Touch Screen			
Input Port	RJ45*1, USB*2, HDMI*1, VGA*1, Audio*1, TF			
Processor	Intel Baytrail-CR(Quad-core), Z3735G			
RAM	2G			
ROM	64G			
MicroSD Type	MicroSD(TF)			
GB	28G			
Bluetooth	Support			
Input Voltage	AC100-240V(50/60HZ)			
Working Temperature	0~40°C			
Working Humidity	10% ~ 80%RH			
Accessory	Ac Power Cord, WIFI Antenna, Remote Control, QSG, CD Specification, Product Certificate, Warranty Card			



Specification

Model	43 inch	49 inch	55 inch
Screen Size	43"	49"	55"
Display Size (mm)	530.96(H) ×941.94 (V)	606(H) ×1075.78 (V)	684.17 (H) ×1213.57 (V)
Aspect Ratio	9:16	9:16	9:16
Resolution	1920×1080	1920×1080	1920×1080
Brightness	450 cd/m2	450 cd/m2	450 cd/m2
Contrast Ratio	5000:1	5000:1	5000:1
View Angle	178°	178°	178°
Colors	16.7M	16.7M	16.7M
Life Time	60000 hours	60000 hours	60000 hours
Product Size (mm)	667 (H) ×1800 (V) ×79.5 (D)	766 (H) ×1850 (V) ×79.5 (D)	827 (H) ×1947 (V) ×79.5 (D)
Packing Size (mm)	854 (H) ×1960 (V) ×572 (D)	943 (H) ×2010 (V) ×572 (D)	1005 (H) ×2125 (V) ×572 (D)
Weight	Net Weight: 80KG Gross Weight: 86KG	Net Weight: 85KG Gross Weight: 92KG	Net Weight: 88KG Gross Weight: 96KG
Power	52W	65W	80W
Speaker		806W	
Operation System		Android&Win8.1	
Touch Points		Over 6 Points	
Touch Screen Type		Infrared Touch Screen	
Input Port		RJ45*1, USB*2, HDMI*1, VGA*1, Audio*1, TF	
Processor		Intel Baytrail-CR(Quad-core), Z3735G	
RAM		2G	
ROM		64G	
MicroSD Type		MicroSD(TF)	
GB		128G	
Bluetooth		Support	
Input Voltage		AC100-240V(50/60HZ)	
Working Temperature		0~40°C	
Working Humidity		10% ~ 80%RH	
Accessory	Specification(CD), Warranty Card, Remote Control, Certificate of Quality, QSG, Power Cord, Wifi Antenna, Key		

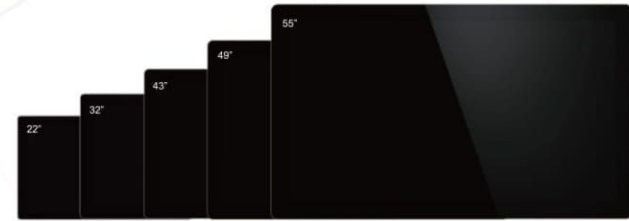

Specification

Model	22 inch	32 inch	43 inch	49 inch	55 inch
Screen Size	22"	32"	43"	49"	55"
Display Size (mm)	476.046 (H) ×267.786(V)	698.4 (H) ×392.9(V)	941.2 (H) ×529.416(V)	1073.78 (H) ×604(V)	1209.6 (H) ×680.4(V)
Aspect Ratio	16:9	16:9	16:9	16:9	16:9
Resolution	1920×1080	1920×1080	1920×1080	1920×1080	1920×1080
Brightness	250 cd/m2	400 cd/m2	450 cd/m2	450 cd/m2	450 cd/m2
Contrast Ratio	1000:1	5000:1	5000:1	5000:1	5000:1
View Angle	178°	178°	178°	178°	178°
Colors	16.7M	16.7M	16.7M	16.7M	16.7M
Life Time	60000 hours	60000 hours	60000 hours	60000 hours	60000 hours
Product Size (mm)	548(H)×340(V)×44.1(D)	786(H)×480.5(V)×61.3(D)	1034.5(H)×622.5(V)×62(D)	1168(H)×698(V)×62.5(D)	1303(H)×744(V)×62.5(D)
Packing Size(mm)	634(H)×424.5(V)×126(D)	908(H)×646(V)×183(D)	1156.5(H)×788(V)×183.6(D)	1290(H)×843.5(V)×184.5(D)	1425(H)×939.5(V)×184.5(D)
VESA(mm)	100×100	200×200	200×400	300×400	300×400
Weight	Net Weight:6.6KG Gross Weight:8.2KG	Net Weight:16.4KG Gross Weight:18.4KG	Net Weight:21.3KG Gross Weight:24.5KG	Net Weight:28.4KG Gross Weight:33.5KG	Net Weight:35.2KG Gross Weight:40.6KG
Power	17W	40W	47W	55W	68W
Speaker			2"2W 4Q		
Operation System			Android&Win8.1		
Touch Points			10 Points		
Touch Screen Type			Capacitive Touch Screen		
Input Port			RJ45*1, USB*2, HDMI*1, VGA*1, Audio*1, TF		
Processor			Intel Baytrail-CR(Quad-core), Z3735G		
RAM			2G		
ROM			64G		
MicroSD Type			MicroSD(TF)		
GB			128G		
Bluetooth			Support		
Input Voltage			AC100-240V(50/60HZ)		
Working Temperature			0~40°C		
Working Humidity			10% ~ 80%RH		
Accessory	Specification(CD), Warranty Card, Remote Control, Certificate of Quality, QSG, Power Cord, Wifi Antenna				



Shenzhen Tongdazhi Technology CO., Ltd

Is a new high-tech enterprise integrating R&D, production, sales and service as a whole, over the years the company is committed to providing a professional witness comparison system and pedestrian access gateway system, access control system, parking lot, ticket management system development, system integration and its application. With the continuous technological innovation and the accumulation of years of experience, we have the ability to provide intelligent access control, ticketing, consumption, attendance management, witness system, parking management system on channel reasonable solutions for customers, system engineering construction of first-class product quality, to improve the quality management system, customer service and strict training mechanism to ensure the long-term, continuous and stable operation of the system.

Applications



< Flap Barrier



< Full Hight turnstile



< Parking-management-systems



< Road Blocker





LED Screen Solution

Business Advertising Solutions

In commercial advertising field, Dicolor has developed professional city information publishing system which is Specific to application scenarios like city exhibition, theme park, Theme Theater, outdoor advertising.

And the system has advantages of high reliability, high performance and high brightness, strong environmental adaptability, intelligent control, which can provide powerful and professional services, such as information editing, transmission, Distribution and management. Through this system, users can easily build a centralized, networked, professional, intelligent multi-media information publishing system. Our diamond level of service quality deserves your lasting trust.

For stage background, Dicolor has always been leading the LED industry. We are introduced some indoor rental products, and also developed outdoor display screens for long-term rents.

Stage rental solutions

For stage background screen, Dicolor broke through the limitation of the traditional screen technology and displayer, its products can be applied to Different application situations, and they can create vivid, splendid scene effect so they are widely used in various stage activities.

Dicolor stage background products are thoroughly designed in true color design, flexible rent, fast Maintenance and convenient modelling.

Sport Stadiums Solution

In stadiums, Dicolor adheres to "Technology is the first productive force". Over the years, Dicolor has made significant investments in stadiums applications, and has accumulated rich experience, together with continuous innovation, now we can provide excellent services from the program design, technology R&D, to high quality Production, plan implementation, and after-sales services.


Indoor HD solution

With the increasing popularity of HD display, intelligent monitoring, how to use the display and control means to improve efficiency and effect of broadcast, has become one of the main topics for people in radio, film and television industry. Our products are of high reliability, high function-price ratio, high environment adaptability, high gray levels, low-light level and intelligent control, which have been widely used in television stations, military command, transportation coordination, video conference, etc. Our diamond level of service quality deserves your lasting trust.

Applications



< Business Advertising Solutions

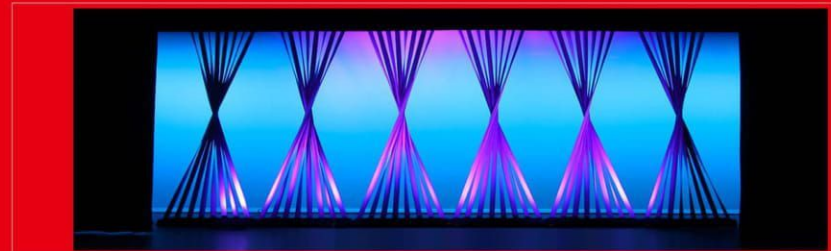

< Stage rental solutions



< Sport Stadiums Solution



< Indoor HD solution